

LiftSafe



Incorrect gripping and turning positions very often lead to strain and wear injuries, even if the items lifted by the person are light. Avoid and prevent this by using the Lift Safe lifting trolley the mobile lifting trolley for the 21 st century, with an electrically adjustable height of the load platform. Matched to the needs of personnel in institutional kitchens, industrial plants, warehouses, chemist's shops and so on. Give free rein to your imagination and put the versatility of the Lift Safe to full use. The lifting trolley can lift and transport cartons, boxes,cans, bags, canteens, plastic baskets and so on.

Mobile Work Positioner 255P

MODULE SYSTEM

With our module system different models can easily be built using our standard modules, compact - wide – tall - low. The trolley is delivered assembled or in parts.

SIMPLE OPERATION

Due to large double wheels, one of them with a directional lock, and compact outside dimensions is very easy to use in confined spaces and corridors. To enable the user to adopt an ergonomic working position, the height of the operating handle is adjustable. No risk of the trolley moving while lifting – an effective parking central brake will keep the trolley firmly in place. A remote control makes loading and unloading safe.

SIMPLE SERVICE

Due to exchangeable standard components the lift trolley provides best possible serviceability. The electronics and batteries are easily accessible. The freight costs are minimised while Lift Safe is delivered in two parts, the chassis and the column. It is easily assembled.


SIMPLE AND SAFE TECHNOLOGY

A number of options, load platforms with built in scales, adjustable forks, makes the trolley very flexible. The electrical liftable load platform is powered by environment friendly lead batteries that you recharge during night.

To avoid injuries the load platform automatically brakes at 3 kilos of pressure. The overload protection brakes at maximum load. Lift Safe lifters can not rust as they are made of aluminum and stainless steel.

TECHNICAL SPECIFICATION

Total Height	1952 – 2452	mm
Length	1139	mm
Width	556, 680, 930	mm
Load Platform	550 x 590	mm
Lifting Height	1130 – 1830	mm
Lifting Speed	120	mm/sec
Lifting Speed	70	mm/sec
Front / rear wheel	77.5, 82, 125/150	mm
Max Load	255	Kg
Dead Weight	70-90	Kg
Battery Voltage	24	V
<i>Battery Charger Included</i>		

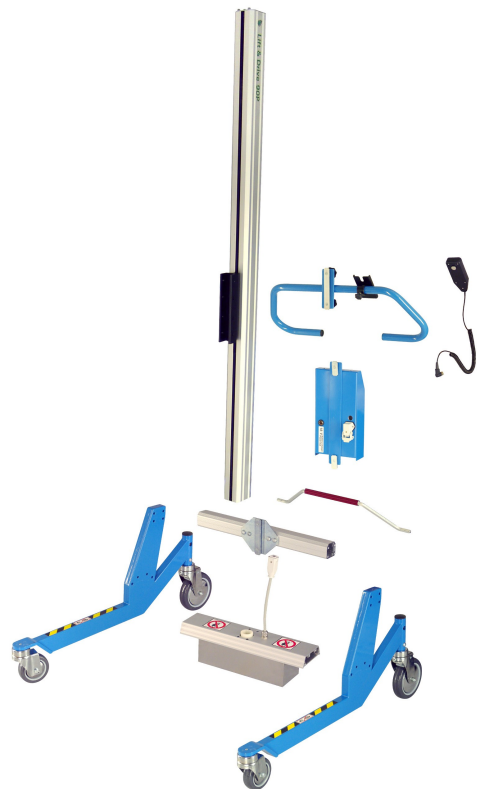

Unit F, Prince of Wales Industrial Park, Vulcan Street, Oldham, OL1 4ER, United Kingdom

Telephone +44 (0) 161 626 9628 **Facsimile** +44 (0) 161 626 9728

Email info@liftsafe.net **Web** www.liftsafe.net